



20 000 072-1, 20 000 073-1, 20 000 075-1



Wide-range Switching Power WNT15

Only skilled electricians may install this electrical equipment otherwise there is the risk of fire or electric shock!

Temperature at mounting location:
-10°C up to +50°C.
Storage temperature: -25°C up to +70°C.
Relative humidity:
annual average value <75%.

WNT15-12V DC/24W and WNT15-24V DC/24W:

Rated capacity 24W.
Standby loss 0.1 watt only.
Efficiency 91%.

WNT15-24V DC/48W:

Rated capacity 48W.
Standby loss 0.2 watt only.
Efficiency 92%.

Modular devices for DIN-EN 60715 TH35 rail mounting.

24W-devices:

1 module = 18 mm wide, 58 mm deep.

48W-devices:

2 modules = 36 mm wide, 58 mm deep.

At a load of more than 50% of the rated capacity and always if there are adjacent switching power supply units and if there are dimmers a ventilation clearance of ½ module must be maintained with the spacers DS12 on both sides.

Wide-range input voltage 88-264V AC (110V -20% to 240V +10%).

Stabilised output voltage ±1%,
low residual ripple. Short-circuit proof.

Overload protection and over-temperature switch-off by means of switching off with automatic switching-on after fault clearance (autorecovery function).

Technical data


Residual ripple	<100mV
Class of protection	II
Protection degree	IP20
Starting current ¹⁾	18A/230V
Overload protectionshort-term	160-200%
Overvoltage protection	140-170%
Switchable in parallel, number WNT15-24V DC-48W	2 -
Operating temperature	-10/+50°C

¹⁾ If connected on the primary side, 2ms.

Manuals and documents in further languages:



<https://eltako.com/redirect/WNT15->

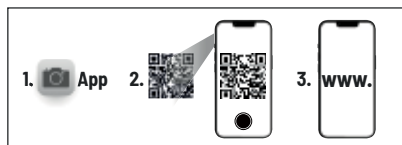

Must be kept for later use!

We recommend the housing for operating instructions GBA14.

ELTAKO GmbH

D-70736 Fellbach

Technical Support English:

+49 711 94350025

technical-support@eltako.de

eltako.com

02/2024 Subject to change without notice.